




FREE STANDING & WALL MOUNT

BASE
PACKAGE

Double Crosses can be mounted for use with fat (2") or skinny (1.25") bar pull-up bar

Choose between 4' or 6' depth

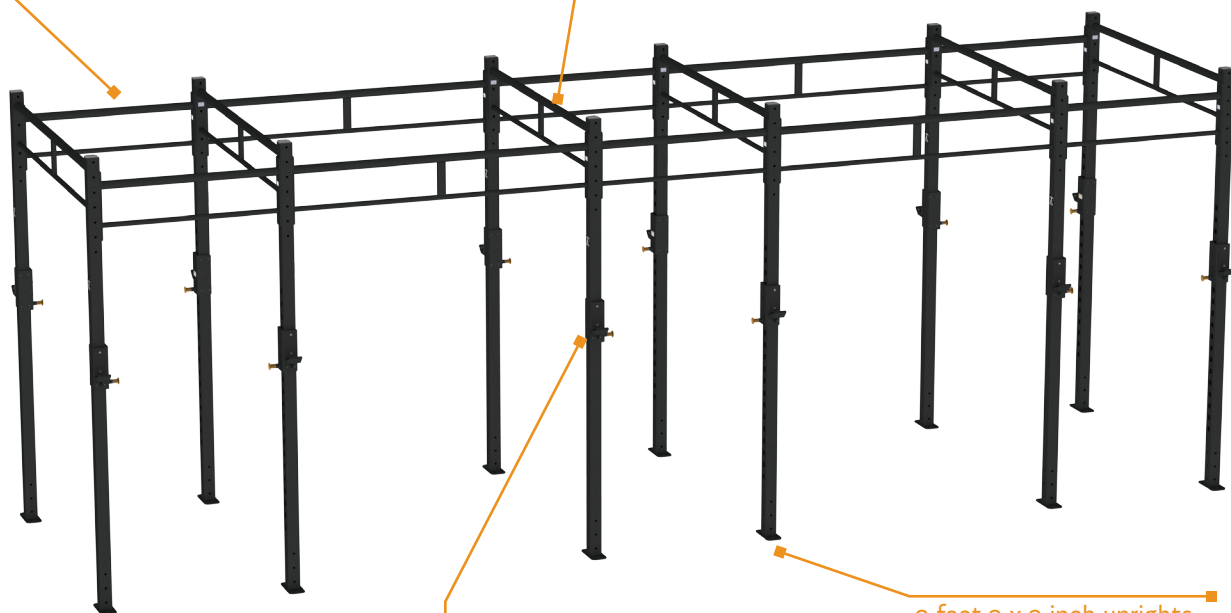


J-Hook Bar Supports standard for every Olympic Station
(24' rack shown includes 6 pairs)

9 foot 3 x 3 inch uprights

Model Shown:
XRFS-6-24

Model number - Free Standing	XRFS-DEPTH-LENGTH
Model number - Wall Mount	XRWM-DEPTH-LENGTH
XRFS vs. XRWM	Wall-Mounts contain 1/2 the uprights and Olympic stations
Height	Frame: 107.1" (272 cm) Opt. Ball Target: 126.7" (322 cm) Opt. Flying Pull-up: 127.5" (324 cm)
Warranty	10 year frame and welds/1 year parts/90 days misc.
Specifications and options	See page 2

TOP VIEW

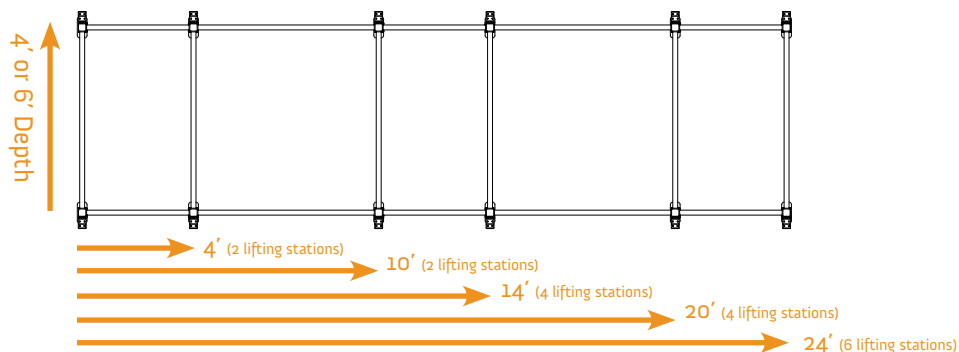

Note: Standard rack packages available in 4' or 6' depths and the lengths listed.

Custom racks available - call for details.





FREE STANDING & WALL MOUNT

BASE
PACKAGE

X-RACK SPECIFICATIONS

Cross Member Options:

4' flying pull-up (XRACK-4FPU)

4' triple cross (XRACK-4TX)

6' triple cross (XRACK-6TX)

4' single cross (XRACK-4SX)

6' single cross (XRACK-6SX)

4' multi-grip cross (XRACK-4MGX)

4' rectangular cross (XRACK-4RX)

6' rectangular cross (XRACK-6RX)

XRACK-6DX double cross
standard. (XRACK-6DX)

Double crosses
(DX) standard for
front to back
cross members.

All 4' or 6' cross
members are
optional.

4' double cross
standard. (XRACK-4DX)

9 foot uprights standard.
12' uprights optional (XRACK-12U)

Frame	Structural grade 3" x 3" 11 gauge (3mm) frame with 1.25" and 2" Dia 11 gauge (3mm) pull-up bars with Thru-Plate™ fully-welded construction into 3/8" (8mm) plates.
Finish	5 mil thick Storm grey wrinkle textured powder-coat paint for superior grip and long lasting protection.
Hardware	Zinc plated 1/2" Grade 5 socket head cap screws with oversized 1.25" OD washers that prevent tube deformation and vibration resistant nyloc nuts.
Attachment design	J-Hooks, bar catches and other attachments utilize UHMW wear guards on both the outside and inside to protect the bar and the upright finish.
Floor/Wall mounting hardware	Not included (construction material dependent) Manufacturer requires that these products be mounted to the floor and wall (if wall mount) to stabilize and eliminate rocking or tipping over.
Included with base packages	Uprights, cross members, J-Hooks, and hardware to assemble frame.
Frame upright options	7.75', 9' and 12' upright options and 3' or 6' extensions (for total height of 15' or 18').
Cross-member options	Single, double, triple, 3 x 3" rectangular, flying pull-up, and multi-grip pull-up options. (Monkey bar rigs also available)
Optional attachments	Flying pull-up, dip, plyo-step, bar catch, ground rotational trainer, ball target, ball rebounder, triple play, urethane upright boot, accessory tray, weight storage, benches, base plates, 3' and 6' upright extensions
Warranty	Commercial warranty: 10 year frame and welds/1 year parts/90 days miscellaneous

Note: X-Racks are required to be mounted to the floor and wall (if wall mount) to stabilize and eliminate rocking or tipping over.

